


Primo 2 AD SK

Anchor point for concrete surfaces

DIN EN
795

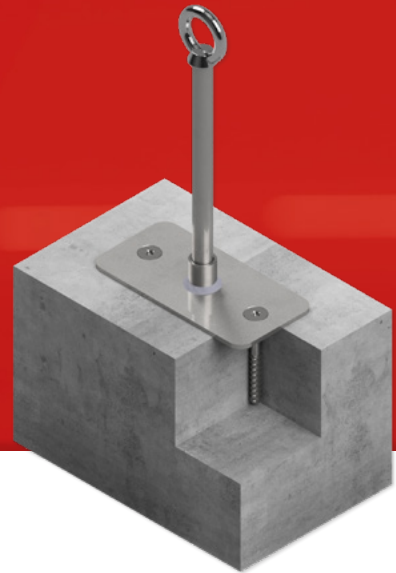

Technical specifications	
Material	Stainless steel (V2A)
Pipe diameter	Ø 20 mm
Base plate	100 x 200 x 5 mm
Number of users	max. 3 persons
Concrete strength	min. C20 / 25
Concrete thickness	min. 100 mm
Edge distance	min. 200 mm
Drilling hole diameter	10 mm
Drilling hole depth	75 mm
Countersunk head screws (2 pcs.)	UltraCut FBS II 10 x 65 10/-/- SK R

Version	Art. no.	Height	Roof structure
Primo 2 AD SK/30	121301	300 mm	0 - 100 mm
Primo 2 AD SK/40	121401	400 mm	0 - 200 mm
Primo 2 AD SK/50	121501	500 mm	0 - 300 mm
Primo 2 AD SK/60	121601	600 mm	0 - 400 mm
Primo 2 AD SK/70	121701	700 mm	0 - 500 mm
Primo 2 AD SK/80	121801	800 mm	100 - 600 mm
Primo 2 AD SK/90	121901	900 mm	200 - 700 mm