


Primo 7 HS

Anchor point for wooden formwork

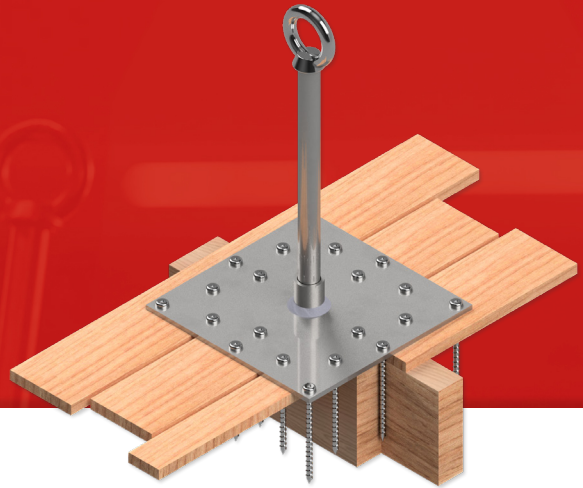

Technical specifications	
Material	stainless steel (V2A)
Pipe diameter	Ø 20 mm
Base plate	200 x 200 x 5 mm
Number of users	max. 2 persons
Wood strength	min. C24
Cross-section of the wooden beam	min. 60 x 100 mm
Thickness of the wooden formwork	min. 24 mm
Width of the wooden formwork	100 - 300 mm
Edge distance to the end of the beam	min. 500 mm
Distance between two beams	max. 930 mm
Round head wood construction screw (20 pcs.)	6 x 100 TX 25

Version	Art.-Nr.	Height	Roof structure
Primo 7 HS/30	171300	300 mm	0 - 100 mm
Primo 7 HS/40	171400	400 mm	0 - 200 mm
Primo 7 HS/50	171500	500 mm	0 - 300 mm
Primo 7 HS/60	171600	600 mm	0 - 400 mm
Primo 7 HS/70	171700	700 mm	0 - 500 mm
Primo 7 HS/80	171800	800 mm	100 - 600 mm
Primo 7 HS/90	171900	900 mm	200 - 700 mm
Primo 7 HS/100	1719100	1000 mm	300 - 800 mm