


## Guardrail GLK

Load-bearing guardrail

DIN EN  
**13374**

DIN EN ISO  
**14122**

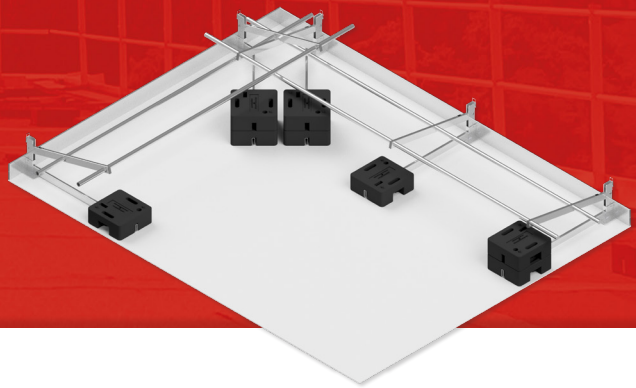

| Technical specifications        |                        |
|---------------------------------|------------------------|
| Material                        | Aluminium              |
| Guardrail system                | Load-bearing           |
| Post                            | foldable               |
| Plastic weights                 | á 25 kg                |
| Length of the base bracket      | 1220 mm                |
| Post heights available          | 1100 / 1200 / 1300 mm  |
| Hand & knee rail diameter       | Ø 40 mm                |
| Tested for lightning protection | acc. to DIN EN 62561-1 |

| Norms                                | DIN EN 13374:A | DIN EN 14122-3 |
|--------------------------------------|----------------|----------------|
| Roof inclination                     | max. 10°       | -              |
| Section height between the rails     | max. 470 mm    | max. 470 mm    |
| Center distance of the railing posts | max. 2500 mm   | max. 1500 mm   |
| Toe board required with attic height | < 180 mm       | < 100 mm       |

| Version           | Art. no. |
|-------------------|----------|
| SKB Guardrail GLK | 930010   |