


Primo 19 ST BMP

Anchor point for steel surfaces

DIN EN
795

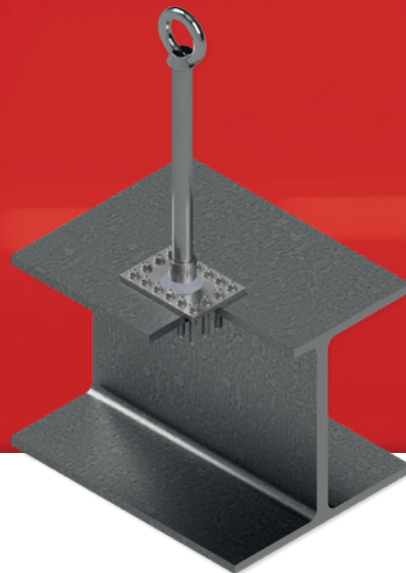

Technical specifications			
Material	Stainless steel (V2A)	Stainless steel (V2A)	Stainless steel (V2A)
Pipe diameter	Ø 20 mm	Ø 20 mm	Ø 20 mm
Base plate	100 x 70 x 5 mm	100 x 70 x 5 mm	100 x 70 x 5 mm
Number of users	max. 3 persons	max. 3 persons	max. 3 persons
Steel strength	min. S235	min. S235	min. S235
Steel thickness	3 - 4 mm	4 - 12 mm	4 - 16 mm
Drilling screws (12 pcs.)	EJOT JT-6-5,5 x 35	EJOT JT-12-5,5 x 40	EJOT JT-18-5,5 x 55

Version	Art. no.	Height	Roof structure
Primo 19 ST BMP/30	CH109300	300 mm	0 - 100 mm
Primo 19 ST BMP/40	CH109400	400 mm	0 - 200 mm
Primo 19 ST BMP/50	CH109500	500 mm	0 - 300 mm
Primo 19 ST BMP/60	CH109600	600 mm	0 - 400 mm
Primo 19 ST BMP/70	CH109700	700 mm	0 - 500 mm
Primo 19 ST BMP/80	CH109800	800 mm	100 - 600 mm
Primo 19 ST BMP/90	CH109900	900 mm	200 - 700 mm
Primo 19 ST BMP/100	CH1099100	1000 mm	300 - 800 mm