


## Primo 19 ST

Anchor point for steel surfaces

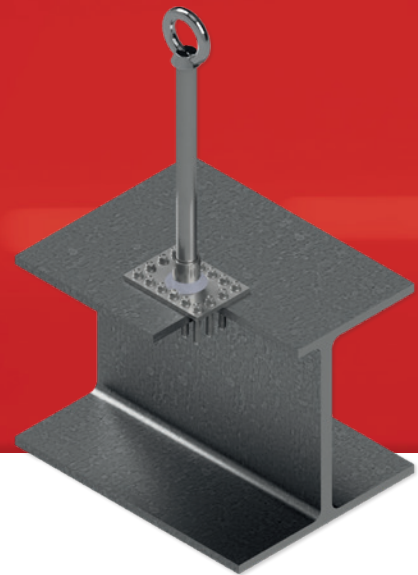

| Technical specifications  |                       |                       |                       |
|---------------------------|-----------------------|-----------------------|-----------------------|
| Material                  | Stainless steel (V2A) | Stainless steel (V2A) | Stainless steel (V2A) |
| Pipe diameter             | Ø 20 mm               | Ø 20 mm               | Ø 20 mm               |
| Base plate                | 100 x 70 x 5 mm       | 100 x 70 x 5 mm       | 100 x 70 x 5 mm       |
| Number of users           | max. 3 persons        | max. 3 persons        | max. 3 persons        |
| Steel strength            | min. S235             | min. S235             | min. S235             |
| Steel thickness           | 3 - 4 mm              | 4 - 12 mm             | 4 - 16 mm             |
| Drilling screws (12 pcs.) | EJOT JT-6-5,5 x 35    | EJOT JT-12-5,5 x 40   | EJOT JT-18-5,5 x 55   |

| Version         | Art. no. | Height  | Roof structure |
|-----------------|----------|---------|----------------|
| Primo 19 ST/30  | 109300   | 300 mm  | 0 - 100 mm     |
| Primo 19 ST/40  | 109400   | 400 mm  | 0 - 200 mm     |
| Primo 19 ST/50  | 109500   | 500 mm  | 0 - 300 mm     |
| Primo 19 ST/60  | 109600   | 600 mm  | 0 - 400 mm     |
| Primo 19 ST/70  | 109700   | 700 mm  | 0 - 500 mm     |
| Primo 19 ST/80  | 109800   | 800 mm  | 100 - 600 mm   |
| Primo 19 ST/90  | 109900   | 900 mm  | 200 - 700 mm   |
| Primo 19 ST/100 | 1099100  | 1000 mm | 300 - 800 mm   |