


Primo 20 HU

Anchor point for wooden surfaces

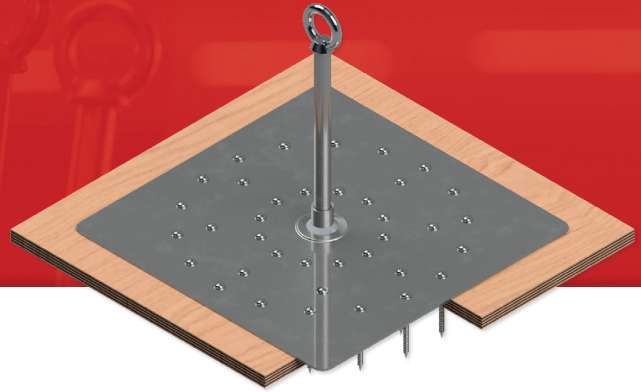

Technical specifications	
Material	Stainless steel (V2A)
Pipe diameter	Ø 20 mm
Base plate	417 x 417 x 3 mm
Number of users	max. 3 persons
Wood strength	min. C24
OSB board	min. 22 mm
Wooden formwork	min. 24 mm
Tongue and groove board	min. 24 mm
Multi-layer board	min. 21 mm
Purlin distance	max. 1200 mm
Edge distance to the end of the beam	min. 145 mm
Plate head screws (38 pcs.)	6 x 40

Version	Art. no.	Height	Roof structure
Primo 20 HU/30	174300	300 mm	0 - 100 mm
Primo 20 HU/40	174400	400 mm	0 - 200 mm
Primo 20 HU/50	174500	500 mm	0 - 300 mm
Primo 20 HU/60	174600	600 mm	0 - 400 mm
Primo 20 HU/70	174700	700 mm	0 - 500 mm