


Primo 20 HU ES

Anchor point for wooden surfaces

DIN EN
795

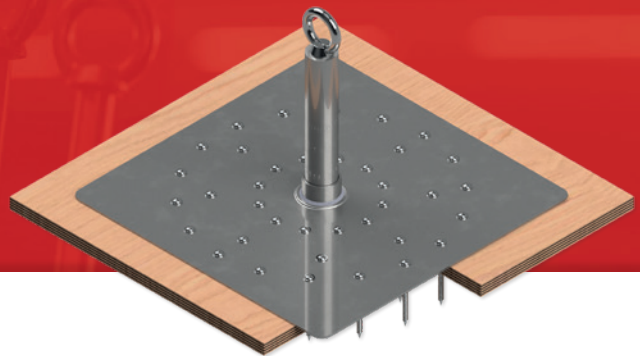

Technical specifications		
Material	Stainless steel (V2A)	Stainless steel (V2A)
Pipe diameter	Ø 40 mm	Ø 40 mm
Base plate	417 x 417 x 3 mm	417 x 417 x 3 mm
Number of users	max. 2 persons	max. 3 persons
Wood strength	min. C24	min. C24
OSB board	min. 12 mm	min. 18 mm
Wooden formwork	min. 18 mm	min. 24 mm
Tongue and groove board	min. 18 mm	min. 24 mm
Three-layer board	min. 12 mm	min. 18 mm
Multi-layer board	min. 12 mm	min. 18 mm
Purlin distance	max. 1200 mm	max. 1200 mm
Edge distance to the end of the beam	min. 600 mm	min. 600 mm
Plate head screws (38 pcs.)	6 x 40	6 x 40

Version	Art. no.	Height	Roof structure
Primo 20 HU ES/30	CH163400	300 mm	0 - 100 mm
Primo 20 HU ES/40	CH163401	400 mm	0 - 200 mm
Primo 20 HU ES/50	CH163402	500 mm	0 - 300 mm
Primo 20 HU ES/60	CH163403	600 mm	0 - 400 mm
Primo 20 HU ES/70	CH163404	700 mm	0 - 500 mm
Primo 20 HU ES/80	CH163405	800 mm	100 - 600 mm