


Primo 25 HU

Anchor point for wooden surfaces

DIN EN
795

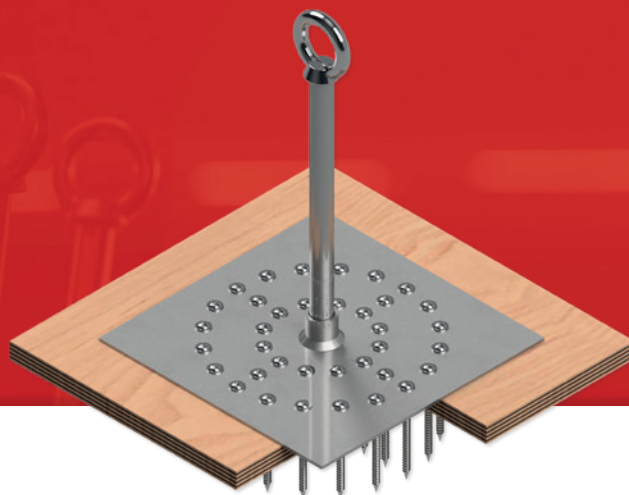

Technical specifications	
Material	Stainless steel (V2A)
Pipe diameter	Ø 20 mm
Base plate	250 x 250 x 5 mm
Number of users	max. 3 persons
Wood strength	min. C24
OSB board	min. 18 mm
Three-layer board	min. 18 mm
Multi-layer board	min. 18 mm
Cross section of the beam	60 x 120 mm
Edge distance to the end of the beam	min. 600 mm
Plate head screws (38 pcs.)	6 x 40

Version	Art. no.	Height	Roof structure
Primo 25 HU/30	176300	300 mm	0 - 100 mm
Primo 25 HU/40	176400	400 mm	0 - 200 mm
Primo 25 HU/50	176500	500 mm	0 - 300 mm
Primo 25 HU/60	176600	600 mm	0 - 400 mm
Primo 25 HU/70	176700	700 mm	0 - 500 mm
Primo 25 HU/80	176800	800 mm	100 - 600 mm