


Primo 2 AD NL

Anchor point for concrete surfaces

DIN EN
795

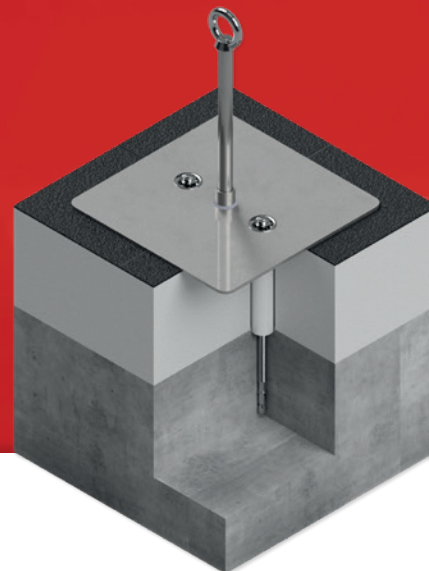

Technical specifications	
Material	Stainless steel (V2A)
Pipe diameter	Ø 20 mm
Base plate	300 x 300 x 5 mm
Number of users	max. 2 persons
Concrete strength	min. C20 / 25
Concrete thickness	min. 120 mm
Edge distance	min. 200 mm
Drilling hole diameter	12 mm
Drilling hole depth	95 mm
Bolt anchors (2 pcs.)	FAZ II 12/10 R or MKT BZ3 M12x105/0-30 A4
Installation	On insulation (without opening the roof membrane)

Version	Art. no.	Height	Roof structure
Primo 2 AD NL/10	NL127330	300 mm	0 - 100 mm
Primo 2 AD NL/20	NL127300	300 mm	0 - 200 mm