


Primo 20 HU NL

Anchor point for wooden surfaces

DIN EN
795

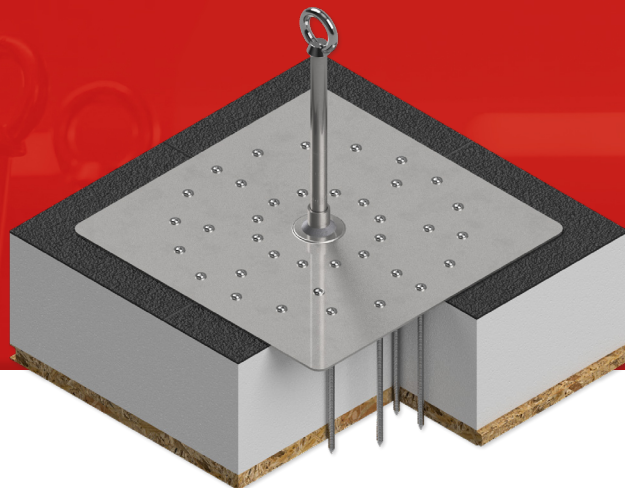

Technical specifications	
Material	stainless steel (V2A)
Pipe diameter	Ø 20 mm
Base plate	417 x 417 x 3 mm
Number of users	max. 3 persons
Wood strength	min. C24
OSB board	min. 22 mm
Wooden formwork	min. 24 mm
Tongue & groove board	min. 24 mm
Multi-layer wood boards	min. 21 mm
Purlin distance	max. 1200 mm
Edge distance to the end of the beam	min. 600 mm
Disc head screws (38 pcs.)	6 x 40
Installation	on insulation (without opening the roof membrane)

Version	Art.-Nr.	Height
Primo 20 HU ES/80	NL163260	300 mm