


Primo 3 AD - 12

Anchor point for concrete surfaces

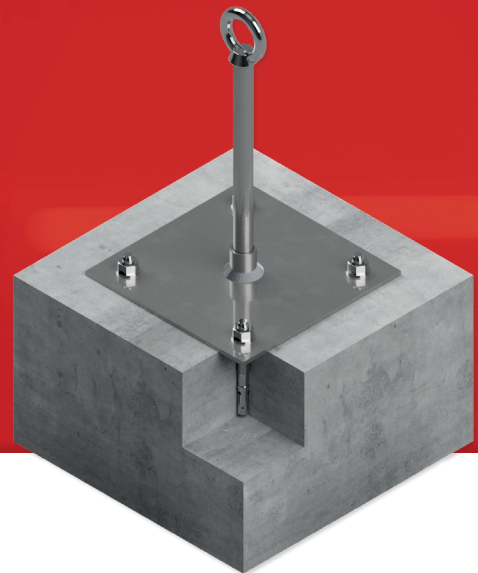

Technical specifications	
Material	Stainless steel (V2A)
Pipe diameter	Ø 20 mm
Base plate	220 x 220 x 5 mm
Number of users	max. 3 persons
Concrete strength	min. C20 / 25
Concrete thickness	min. 100 mm
Edge distance	min. 200 mm
Drilling hole diameter	Ø 12 mm
Drilling hole depth	68,5 mm
Bolt anchors (4 pcs.)	FAZ II 12/10 K R or MKT BZ3 M12x85/0-10 A4

Version	Art. no.	Height	Roof structure
Primo 3 AD-12/30	134300	300 mm	0 - 100 mm
Primo 3 AD-12/40	134400	400 mm	0 - 200 mm
Primo 3 AD-12/50	134500	500 mm	0 - 300 mm
Primo 3 AD-12/60	134600	600 mm	0 - 400 mm
Primo 3 AD-12/70	134700	700 mm	0 - 500 mm
Primo 3 AD-12/80	134800	800 mm	100 - 600 mm
Primo 3 AD-12/80	134900	900 mm	200 - 700 mm
Primo 3 AD-12/100	1349100	1000 mm	300 - 800 mm