


## Primo 3 AD - 10

Anchor point for concrete surfaces

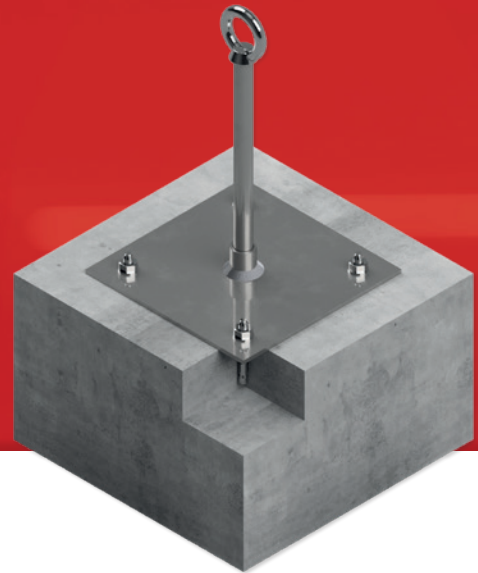

| Technical specifications |                                            |
|--------------------------|--------------------------------------------|
| Material                 | Stainless steel (V2A)                      |
| Pipe diameter            | Ø 20 mm                                    |
| Base plate               | 220 x 220 x 5 mm                           |
| Number of users          | max. 3 persons                             |
| Concrete strength        | min. C20 / 25                              |
| Concrete thickness       | min. 80 mm                                 |
| Edge distance            | min. 200 mm                                |
| Drilling hole diameter   | Ø 10 mm                                    |
| Drilling hole depth      | 57 mm                                      |
| Bolt anchors (4 pcs.)    | FAZ II 10/10 K R or MKT BZ3 M12x85/0-10 A4 |

| Version           | Art. no. | Height  | Roof structure |
|-------------------|----------|---------|----------------|
| Primo 3 AD-10/30  | 139300   | 300 mm  | 0 - 100 mm     |
| Primo 3 AD-10/40  | 139400   | 400 mm  | 0 - 200 mm     |
| Primo 3 AD-10/50  | 139500   | 500 mm  | 0 - 300 mm     |
| Primo 3 AD-10/60  | 139600   | 600 mm  | 0 - 400 mm     |
| Primo 3 AD-10/70  | 139700   | 700 mm  | 0 - 500 mm     |
| Primo 3 AD-10/80  | 139800   | 800 mm  | 100 - 600 mm   |
| Primo 3 AD-10/80  | 139900   | 900 mm  | 200 - 700 mm   |
| Primo 3 AD-10/100 | 1399100  | 1000 mm | 300 - 800 mm   |