


Primo 3 AD BMP

Anchor point for concrete surfaces

DIN EN
795

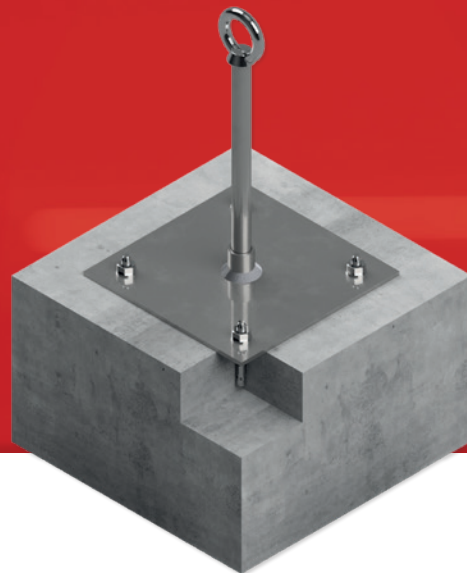

Technical specifications	
Material	Stainless steel (V2A)
Pipe diameter	Ø 20 mm
Base plate	220 x 220 x 5 mm
Number of users	max. 3 persons
Concrete strength	min. C20 / 25
Concrete thickness	min. 80 mm
Edge distance	min. 200 mm
Drilling hole diameter	Ø 10 mm
Drilling hole depth	57 mm
Bolt anchors (4 pcs.)	FAZ II 10/10 K R or MKT BZ3 M12x85/0-10 A4

Version	Art. no.	Height	Roof structure
Primo 3 AD BMP/30	CH139300	300 mm	0 - 100 mm
Primo 3 AD BMP/40	CH139400	400 mm	0 - 200 mm
Primo 3 AD BMP/50	CH139500	500 mm	0 - 300 mm
Primo 3 AD BMP/60	CH139600	600 mm	0 - 400 mm
Primo 3 AD BMP/70	CH139700	700 mm	0 - 500 mm
Primo 3 AD BMP/80	CH139800	800 mm	100 - 600 mm
Primo 3 AD BMP/90	CH139900	900 mm	200 - 700 mm
Primo 3 AD BMP/100	CH1399100	1000 mm	300 - 800 mm