


Primo 3 AD ES

Anchor point for concrete substrates

DIN EN
795

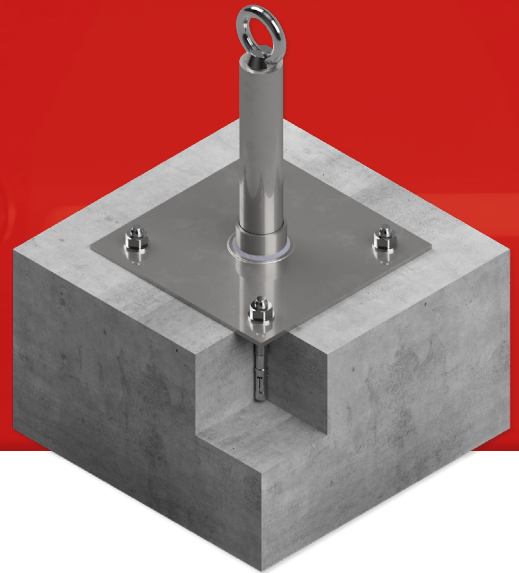

Technical specifications		
Material	stainless steel (V2A)	stainless steel (V2A)
Pipe diameter	Ø 40 mm	Ø 40 mm
Base plate	220 x 220 x 5 mm	220 x 220 x 5 mm
Number of users	max. 3 persons	max. 3 persons
Concrete strength	min. C20 / 25	min. C20 / 25
Concrete thickness	min. 80 mm	min. 80 mm
Edge distance	min. 200 mm	min. 200 mm
Drill hole diameter	Ø 10 mm	Ø 10 mm
Drill hole depth	57 mm	53 mm
Bolt anchor (4 pcs.)	FAZ II Plus 10/10 R	MKT BZ3 M10x70 A4

Version	Art.-Nr.	Height	Roof structure
Primo 3 AD ES/30	CH131301	300 mm	0 - 100 mm
Primo 3 AD ES/40	CH131401	400 mm	0 - 200 mm
Primo 3 AD ES/50	CH131501	500 mm	0 - 300 mm
Primo 3 AD ES/60	CH131601	600 mm	0 - 400 mm
Primo 3 AD ES/70	CH131701	700 mm	0 - 500 mm
Primo 3 AD ES/80	CH131801	800 mm	100 - 600 mm
Primo 3 AD BMP/90	CH139900	900 mm	200 - 700 mm
Primo 3 AD BMP/100	CH1399100	1000 mm	300 - 800 mm