


Primo 3 AD NL

Anchor point for concrete surfaces

DIN EN
795

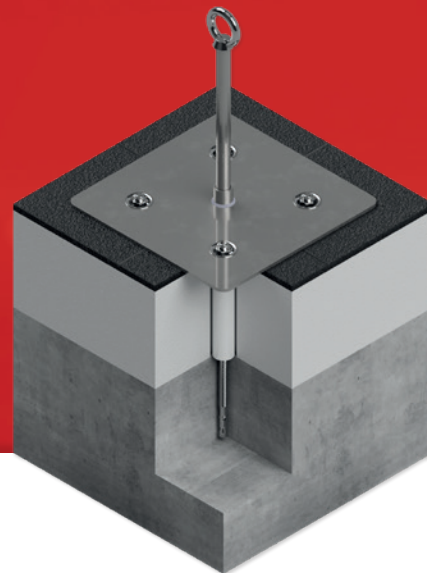

Technical specifications	
Material	Stainless steel (V2A)
Pipe diameter	Ø 20 mm
Base plate	220 x 220 x 5 mm
Number of users	max. 2 persons
Concrete strength	min. C20 / 25
Concrete thickness	min. 80 mm
Edge distance	min. 200 mm
Drilling hole diameter	Ø 10 mm
Drilling hole depth	55 mm
Bolt anchors (4 pcs.)	FAZ II 10/10 K R or MKT BZ3 M12x85/0-10 A4
Installation	On insulation (without opening the roof membrane)

Version	Art. no.	Height	Roof structure
Primo 3 AD NL/10	NL139330	300 mm	0 - 100 mm
Primo 3 AD NL/20	NL139300	300 mm	0 - 200 mm