


Primo 3 SP-HO ES

Anchor point for prestressed concrete hollow ceilings

DIN EN
795

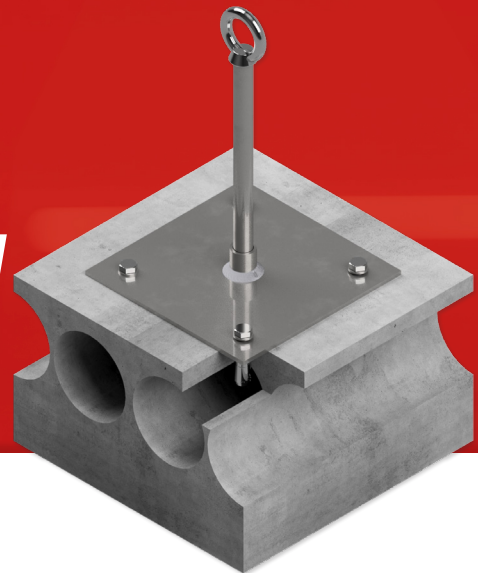

Technical specifications	
Material	stainless steel (V2A)
Pipe diameter	Ø 40 mm
Base plate	220 x 220 x 5 mm
Number of users	max. 3 persons
Concrete strength	min. C45 / 55
Web thickness	min. 27,5 mm
Edge distance	min. 300 mm
Drill hole diameter	Ø 16 mm
Drill hole depth	65 mm
Hollow ceiling anchor (4 pcs.)	FHY M10 R

Version	Art.-Nr.	Height	Roof structure
Primo 3 SP-HO ES/30	CH131330	300 mm	0 - 100 mm
Primo 3 SP-HO ES/40	CH131340	400 mm	0 - 200 mm
Primo 3 SP-HO ES/50	CH131350	500 mm	0 - 300 mm
Primo 3 SP-HO ES/60	CH131360	600 mm	0 - 400 mm
Primo 3 SP-HO ES/70	CH131370	700 mm	0 - 500 mm
Primo 3 SP-HO ES/80	CH131380	800 mm	100 - 600 mm
Primo 3 SP-HO ES/80	CH131390	900 mm	200 - 700 mm
Primo 3 SP-HO ES/100	CH1313910	1000 mm	300 - 800 mm