


Primo 3 SP-HO NL

Anchor point for prestressed concrete

DIN EN
795

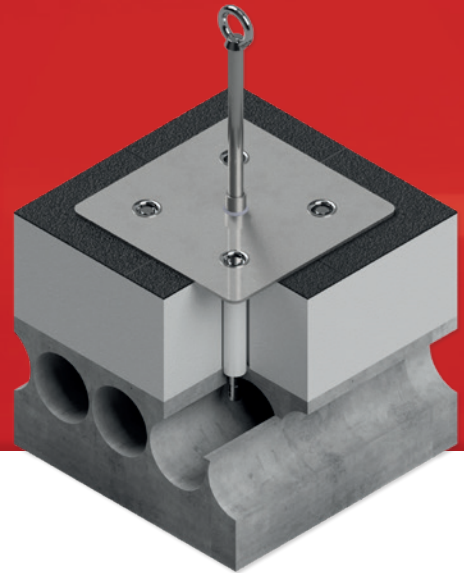

Technical specifications	
Material	Stainless steel (V2A)
Pipe diameter	Ø 20 mm
Base plate	300 x 300 x 5 mm
Number of users	max. 3 persons
Concrete strength	min. C45 / 55
Web thickness	min. 27,5 mm
Edge distance	min. 300 mm
Drilling hole diameter	Ø 16 mm
Drilling hole depth	65 mm
Hollow ceiling anchors (4 pcs.)	FHY M10 A4
Installation	On insulation (without opening the roof membrane)

Version	Art. no.	Height
Primo 3 SP-HO NL	CH131330	300 mm