


Primo 47 SP-HU

Anchor point for sandwich panels

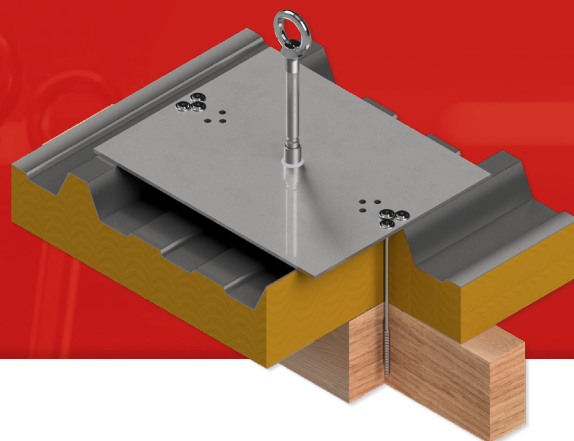


Technical specifications	
Material	Stainless steel (V2A)
Pipe diameter	Ø 20 mm
Base plate	300 x 375 x 5 mm
Height	200 mm
Number of users	max. 3 persons
Substructure	Wooden beam
Wood strength	min. C24
Height of the wooden beam	min. 140 mm
Width of the wooden beam	min. 80 mm
Plate head screws (6 pcs.)	8 mm

Version	Art. no.	Insulation thickness	Screw length
Primo 47 SP-HU/80	H118080	25 - 80 mm	180 mm
Primo 47 SP-HU/120	H118120	100 - 120 mm	220 mm
Primo 47 SP-HU/200	H118200	140 - 200 mm	300 mm

Primo 47 SP-HU

Anchor point for sandwich panels

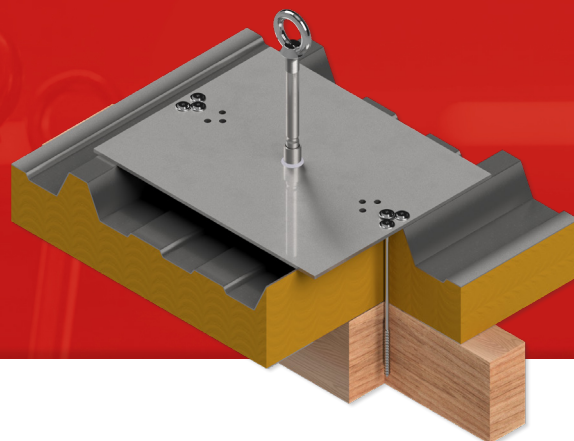

Reference table for required screw lengths:

Insulation core thickness (sandwich) in mm	Total thickness (sandwich) in mm	Screw length in mm for wooden beam 80x120 mm
25	60	160
40	75	180
60	95	200
80	115	220
100	135	240
120	155	260
140	175	280
150	185	300
160	195	300
175	210	300
200	235	300