


Primo 47 SP-ST

Anchor point for sandwich panels

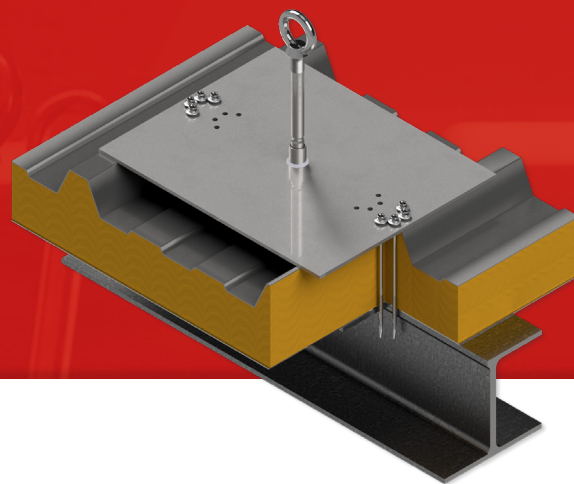


Technical specifications	
Material	Stainless steel (V2A)
Pipe diameter	Ø 20 mm
Base plate	300 x 375 x 5 mm
Height	200 mm
Number of users	max. 5 persons
Substructure	Steel beam
Steel strength	min. S235
Height of the steel profile	min. 80 mm
Width of the steel profile	min. 60 mm
Flange of the steel profile	min. 5,2 mm
Drilling screws (8 pcs.)	JT-D-6H-5,5/6,3 or JT3-D-12H-5,5/6,3

Version	Art. no.	Insulation thickness	Screw length
Primo 47 SP-ST/120	ST118120	25 - 120 mm	175 mm
Primo 47 SP-ST/200	ST118200	140 - 200 mm	275 mm

Primo 47 SP-ST

Anchor point for sandwich panels

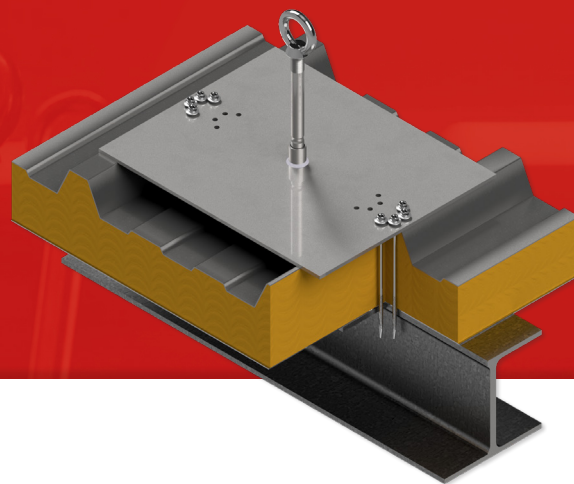

Reference table for required screw lengths:

Insulation core thickness (sandwich) in mm	Total thickness (sandwich) in mm	Screw length in mm for a flange thickness of up to 6 mm	Screw length in mm for a flange thickness of up to 12 mm
25	60	87	95
40	75	107	115
60	95	127	135
80	115	147	155
100	135	167	175
120	155	197	197
140	175	237	215
150	185	237	245
160	195	237	245
175	210	237	245
200	235	267	275