


Primo 47 SP-ZP

Anchor point for sandwich panels

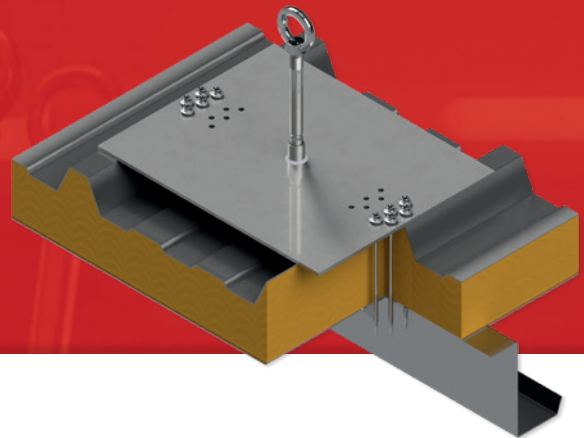

Technical specifications		
Material	Stainless steel (V2A)	Stainless steel (V2A)
Pipe diameter	Ø 20 mm	Ø 20 mm
Base plate	300 x 375 x 5 mm	300 x 375 x 5 mm
Height	200 mm	200 mm
Number of users	max. 4 persons	max. 4 persons
Substructure	Z-purlins	Hollow profiles
Steel strength	min. S320GD	min. S235
Height of the steel profile	min. 140 mm	min. 100 mm
Width of the steel profile	min. 60 mm	min. 60 mm
Sheet thickness	min. 2 mm	min. 2,5 mm
Drilling screws (10 pcs.)	JT-D-6H-5,5/6,3 or JT3-D-12H-5,5/6,3	JT-D-6H-5,5/6,3 or JT3-D-12H-5,5/6,3

Version	Art. no.	Insulation thickness	Screw length
Primo 47 SP-ZP/120	ZP118120	25 - 120 mm	175 mm
Primo 47 SP-ZP/200	ZP118200	140 - 200 mm	267 mm