


Primo 48 LB BMP

Anchor point for aerated concrete

DIN EN
795

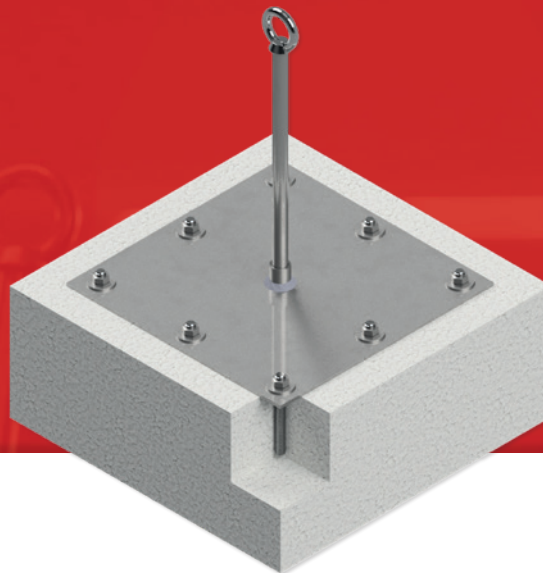

Technical specifications	
Material	Stainless steel (V2A)
Pipe diameter	Ø 20 mm
Base plate	375 x 375 x 5 mm
Number of users	max. 3 persons
Concrete strength	AAC 3,5
Concrete thickness	min. 150 mm
Edge distance	min. 200 mm
Drilling hole diameter	Ø 14 mm
Drilling hole depth	120 mm
Threaded rods (8 pcs.)	12 x 120
Special mortar	FIS V Plus 360 S

Version	Art. no.	Height	Roof structure
Primo 48 LB BMP/30	CH141300	300 mm	0 - 100 mm
Primo 48 LB BMP/40	CH141400	400 mm	0 - 200 mm
Primo 48 LB BMP/50	CH141500	500 mm	0 - 300 mm
Primo 48 LB BMP/60	CH141600	600 mm	0 - 400 mm
Primo 48 LB BMP/70	CH141700	700 mm	0 - 500 mm