


Primo 4 TP 3 NL

Anchor point for trapezoidal sheet metal

DIN EN
795

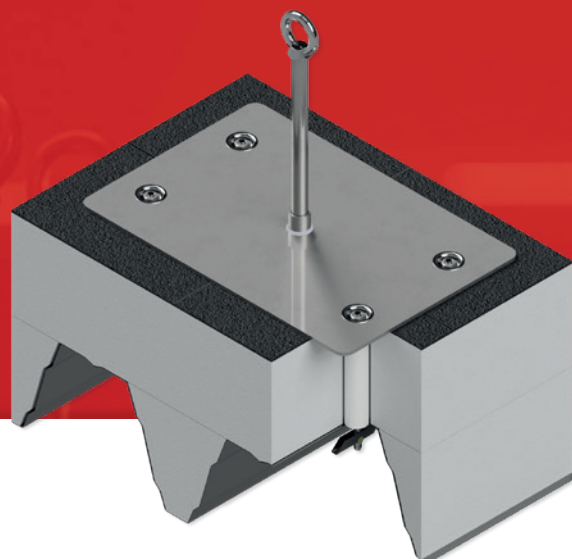

Technical specifications	
Material	Stainless steel (V2A)
Pipe diameter	Ø 20 mm
Base plate	300 x 450 x 5 mm
Number of users	max. 2 persons
Trapeze profiles	200/375 - 200/420
Trapezoidal sheet thickness	min. 0,75 mm
Alignment	Warm roof / positive position
Edge distance to the insulation	min. 1000 mm
Drilling hole diameter in the insulation	Ø 30 mm
Drilling hole diameter	Ø 12 mm
Fastener (4 pcs.)	Tilting dowel
Installation	On insulation (without opening the roof membrane)

Version	Art. no.	Height
Primo 4 TP 3 NL	NL184300	300 mm