


Primo 51 GF

Load-bearing anchor point

DIN EN
795

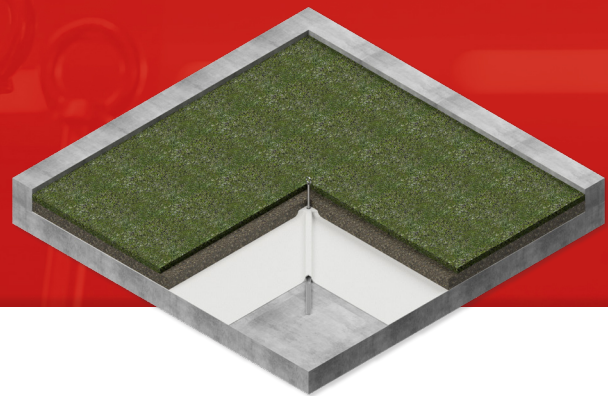

Technical specifications	
Positioning	below drainage, load-bearing fleece & substrate
Cantilever height	20 mm
Material	stainless steel (V2A)
Size	2600 x 2600 mm
Tube diameter	Ø 20 mm
Load -bearing capacity	drainage, fleece & granulate
Number of users	max. 3 Persons
Roof pitch	max. 5°
Weight per unit area	52,5 kg/sqm
Supplied fleece	3 x 3 m

Version	Art.-Nr.	Height
Primo 51 GF 300	119301	300 mm
Primo 51 GF 400	119401	400 mm
Primo 51 GF 500	119501	500 mm
Primo 51 GF 600	119601	600 mm
Primo 51 GF 700	119701	700 mm
Primo 51 GF 800	119801	800 mm
Primo 51 GF 900	119901	900 mm
Primo 51 GF 1000	119111	1000 mm