


Primo 60 AD - 14

Cable access technology for concrete surfaces

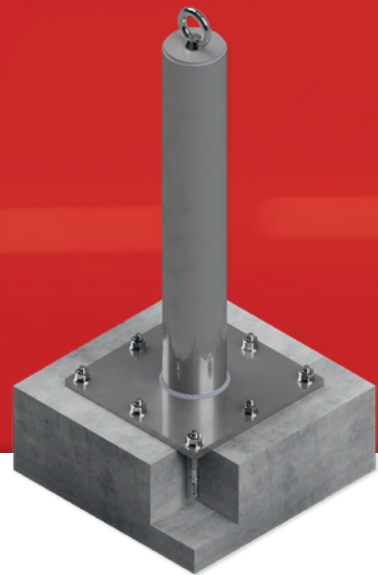

Technical specifications	
Material	Stainless steel (V2A)
Number of users als single anchor point	max. 3 persons
Number of users als cable access technology	max. 1 person
Concrete strength	min. C20 / 25
Concrete thickness	min. 140 mm
Edge distance	min. 600 mm
Installation	Wall, ceiling, overhead

Version	Art. no.	Height	Bolt anchors
Primo 60 AD-14/20	6014200	200 mm	FAZ II 12/20 R
Primo 60 AD-14/30	6014300	300 mm	FAZ II 12/50 R
Primo 60 AD-14/40	6014400	400 mm	FAZ II 12/20 R
Primo 60 AD-14/50	6014500	500 mm	FAZ II 12/10 R
Primo 60 AD-14/60	6014600	600 mm	FAZ II 12/30 R
Primo 60 AD-14/70	6014700	700 mm	FAZ II 12/50 R
Primo 60 AD-14/80	6014800	800 mm	FAZ II 12/50 R
Primo 60 AD-14/90	6014900	900 mm	FAZ II 12/50 R
Primo 60 AD-14/100	6014100	1000 mm	FAZ II 12/50 R