


Primo 60 SP-HO

Cable access technology for prestressed concrete

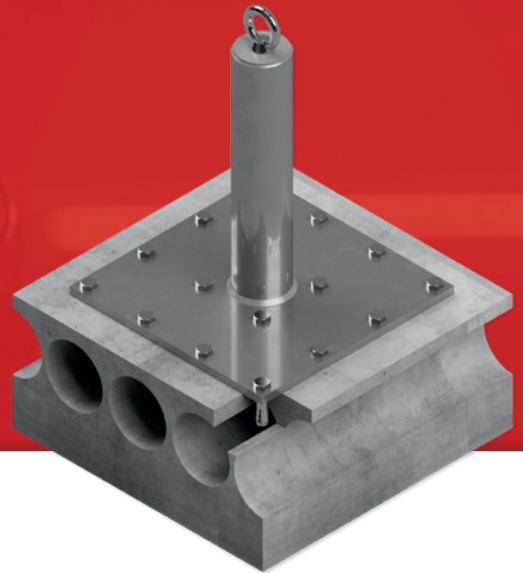

Technical specifications	
Material	Stainless steel (V2A)
Number of users als single anchor point	max. 3 persons
Number of users als cable access technology	max. 1 person
Concrete strength	min. C45 / 55
Web thickness	min. 27,5 mm
Drilling hole depth	60 mm
Hollow ceiling anchors	FHY M10 A4
Installation	Wall, ceiling, overhead

Version	Art. no.	Height
Primo 60 SP-HO/20	6014200	200 mm
Primo 60 SP-HO/30	6014300	300 mm
Primo 60 SP-HO/40	6014400	400 mm
Primo 60 SP-HO/50	6014500	500 mm
Primo 60 SP-HO/60	6014600	600 mm
Primo 60 SP-HO/70	6014700	700 mm
Primo 60 SP-HO/80	6014800	800 mm