
Guardrail BS-SD

Construction guardrail for pitched roofs

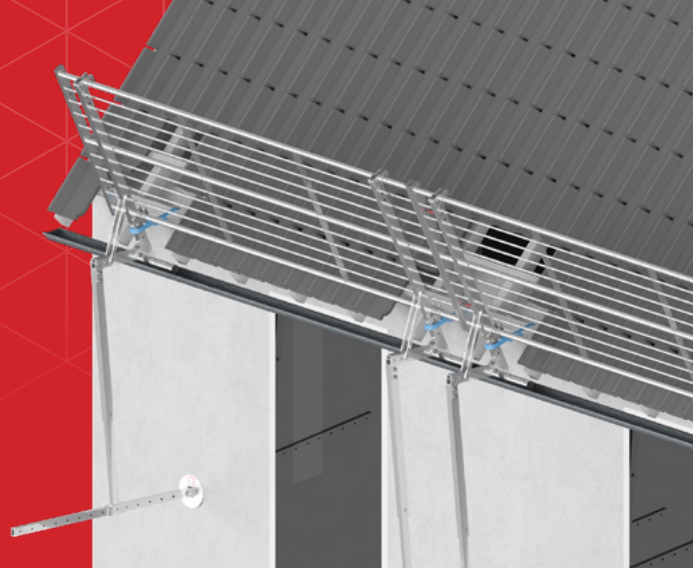

DIN EN 13374:C

Technical specifications	
Material	Aluminium
Available post height	1100 mm
Diameter of the hand and knee rails	Ø 40 mm

Installation	
Positioning	in the rain gutter
Fastening to the facade	using height-adjustable supports

Norms	DIN EN 13374:C
Roof inclination	max. 60°
Area between the rails	max. 100 mm
Axle distance of guardrail posts	max. 1000 mm

Version	Article no.
Guardrail BS-SD	GE970003