
Lifeline system BR 6

Lifeline safety system

DIN EN 17235

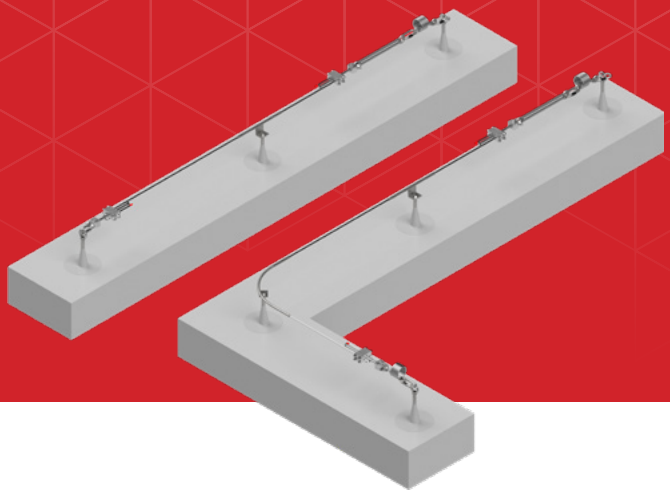

Technical specifications	
Stainless steel rope	Ø 6 mm

Installation	
Number of users	max. 4 persons
Number of users per runner	max. 1 person
Support spacing	max. 10 m
Use	traversable and non-traversable

Version	Article no.
Installation set BR6	709999
Installation set BR6-K	709998

Components	Installation set BR6	Installation set BR6-K
Primo chain lock V2A M12	2 pcs.	3 pcs.
Rope clamp type A (6 mm)	2 pcs.	2 pcs.
Energy absorber	1 pcs.	2 pcs.
Tensioning element	1 pcs.	1 pcs.
Type label	1 pcs.	1 pcs.
End caps	2 pcs.	2 pcs.