
Primo 16 AG 1

Load-bearing anchor point

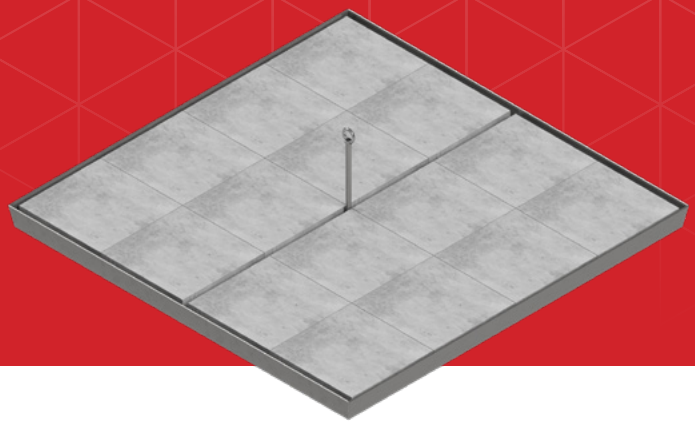

CE DIN EN 795

Technical specifications	
Material	Stainless steel (V2A)
Dimensions (W x L x H)	1630 x 1630 x 95 mm

Installation	
Number of users	max. 1 person
Roof inclination	max. 5°
Ballast	Concrete paving slabs
Concrete paving slabs (Quantity)	32 pcs.
Concrete paving slabs (W x L x H)	400 x 400 x 50 mm

Version	Article no.
Primo 16 AG 1	568100