
Primo 16 AG Z-K

Load-bearing anchor point

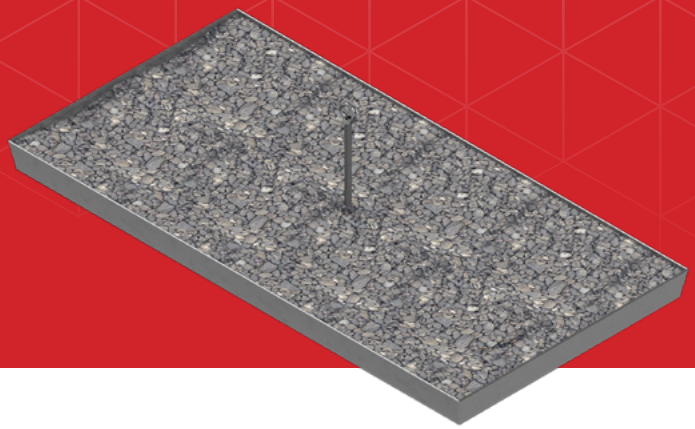

CE DIN EN 795

Technical specifications	
Material	Stainless steel (V2A)
Dimensions (W x L x H)	1630 x 810 x 95 mm

Installation	
Use	intermediate holder in lifeline systems
Roof inclination	max. 5°
Ballast	Gravel
Gravel size	8 – 63 mm

Version	Article no.
Primo 16 AG Z-K	568250