
Primo 16 AG Z

Load-bearing anchor point

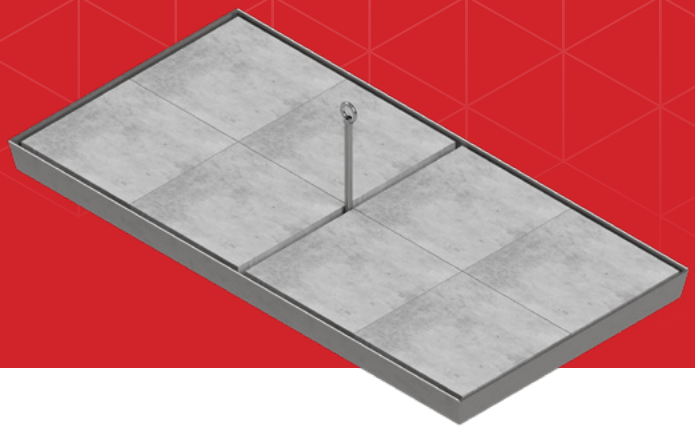

CE DIN EN 795

Technical specifications	
Material	Stainless steel (V2A)
Dimensions (W x L x H)	1630 x 810 x 95 mm

Installation	
Use	intermediate holder in lifeline systems
Roof inclination	max. 5°
Ballast	Concrete paving slabs
Concrete paving slabs (Quantity)	16 pcs.
Concrete paving slabs (W x L x H)	400 x 400 x 50 mm

Version	Article no.
Primo 16 AG Z	568220