
Primo 17 AG Z

Load-bearing anchor point

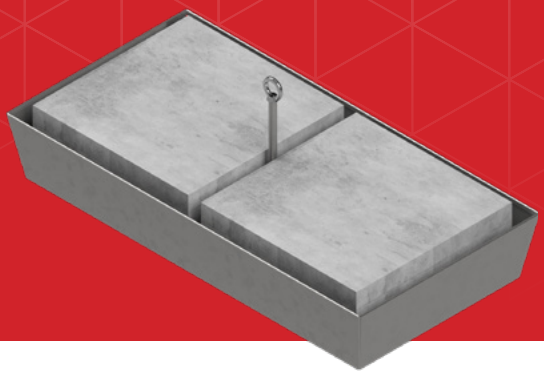

CE DIN EN 795

Technical specifications	
Material	Stainless steel (V2A)
Dimensions (W x L x H)	1030 x 510 x 195 mm

Installation		
Use	intermediate holder in lifeline systems	intermediate holder in lifeline systems
Roof inclination	max. 5°	max. 5°
Ballast	Concrete paving slabs	Concrete paving slabs
Concrete paving slabs (Quantity)	8 pcs.	10 pcs.
Concrete paving slabs (W x L x H)	500 x 500 x 50 mm	500 x 500 x 40 mm

Version	Article no.
Primo 17 AG Z	567200