
Primo 1 ST

Anchor point for steel beams

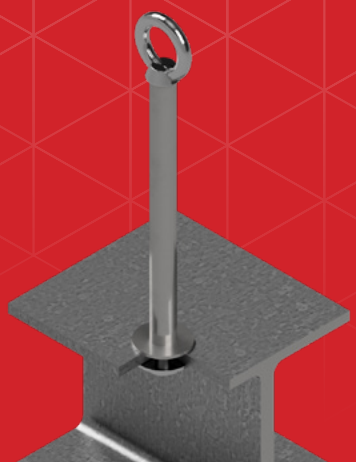

DIN EN 17235 | aBG | Ü

Technical specifications	
Material	Stainless steel (V2A)
Pipe diameter	Ø 22 mm

Installation	
Number of users	max. 3 persons
Steel strength	min. S235
Steel thickness	min. 3 mm
Drill hole diameter	Ø 17 mm
Screw-in depth	min. 20 mm
Hexagonal screw (1 pcs.)	M16-A2-70
Washers (2 pcs.)	M16

Version	Article no.	Height	Roof build-up
Primo 1 ST/30	112300	300 mm	≤ 100 mm
Primo 1 ST/40	112400	400 mm	≤ 200 mm
Primo 1 ST/50	112500	500 mm	≤ 300 mm
Primo 1 ST/60	112600	600 mm	≤ 400 mm
Primo 1 ST/70	112700	700 mm	≤ 500 mm
Primo 1 ST/80	112800	800 mm	100 – 600 mm
Primo 1 ST/90	112900	900 mm	200 – 700 mm
Primo 1 ST/100	1129100	1000 mm	300 – 800 mm