
Primo 20 HU

Anchor point for wooden substrates

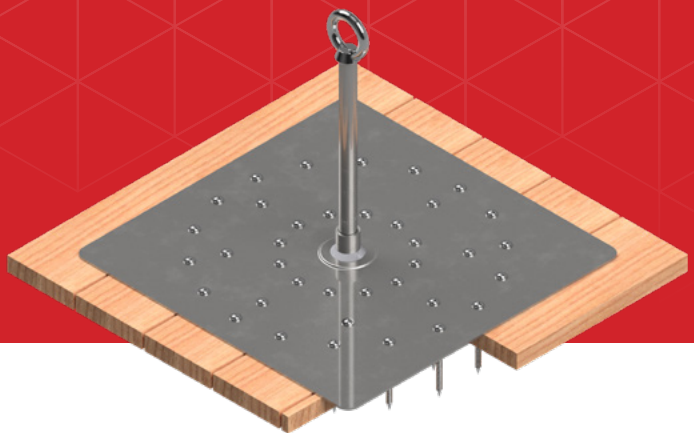

Technical specifications	
Material	Stainless steel (V2A)
Pipe diameter	Ø 20 mm
Base plate	417 x 417 x 3 mm

Installation	
Number of users	max. 3 persons
Wood strength	min. C24
Cross-sectional dimensions of the beam (Width x Height)	min. 60 x 80 mm
OSB board (Width/Thickness)	min. 625 mm / min. 22 mm
Multi-layer board (Width/Thickness)	min. 600 mm / min. 21 mm
Framework board (Width/Thickness)	100 – 300 mm / min. 24 mm
Tongue and groove board (Width/Thickness)	100 – 300 mm / min. 24 mm
Distance between two beams	max. 1200 mm
Edge distance to the end of the beam	min. 145 mm
Washer-head screws (38 pcs.)	6,0 mm / TX25 A2

Version	Article no.	Height	Roof build-up
Primo 20 HU/30	174300	300 mm	≤ 100 mm
Primo 20 HU/40	174400	400 mm	≤ 200 mm
Primo 20 HU/50	174500	500 mm	≤ 300 mm
Primo 20 HU/60	174600	600 mm	≤ 400 mm
Primo 20 HU/70	174700	700 mm	≤ 500 mm
Primo 20 HU/80	174800	800 mm	100 – 600 mm