
Primo 20 HU BMP

Anchor point for wooden substrates

DIN EN 795

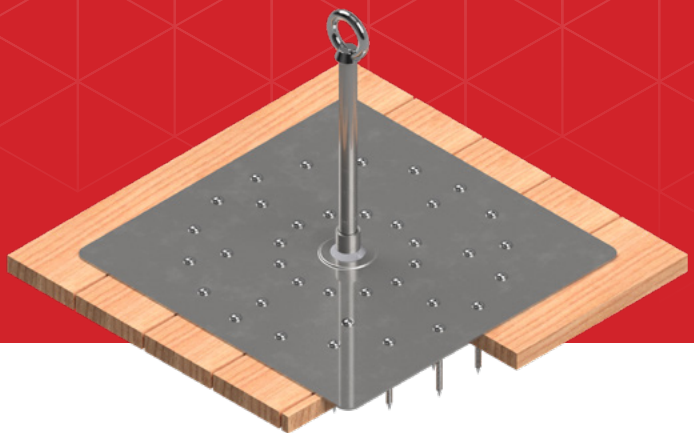

Technical specifications	
Material	Stainless steel (V2A)
Pipe diameter	Ø 20 mm
Base plate	417 x 417 x 3 mm

Installation	
Number of users	max. 3 persons
Wood strength	min. C24
Cross-sectional dimensions of the beam (Width x Height)	min. 60 x 120 mm
OSB board (Width/Thickness)	min. 600 mm / min. 18 mm
Three-layer board (Width/Thickness)	min. 600 mm / min. 18 mm
Multi-layer board (Width/Thickness)	min. 600 mm / min. 18 mm
Framework board (Width/Thickness)	100 – 300 mm / min. 24 mm
Tongue and groove board (Width/Thickness)	100 – 300 mm / min. 24 mm
Distance between two beams	max. 1200 mm
Edge distance to the end of the beam	min. 400 mm
Washer-head screws (38 pcs.)	6,0 mm / TX25 A2

Version	Article no.	Height	Roof build-up
Primo 20 HU BMP/30	AT174300	300 mm	≤ 100 mm
Primo 20 HU BMP/40	AT174400	400 mm	≤ 200 mm
Primo 20 HU BMP/50	AT174500	500 mm	≤ 300 mm
Primo 20 HU BMP/60	AT174600	600 mm	≤ 400 mm
Primo 20 HU BMP/70	AT174700	700 mm	≤ 500 mm