
Primo 25 HU

Anchor point for wooden substrates

DIN EN 795

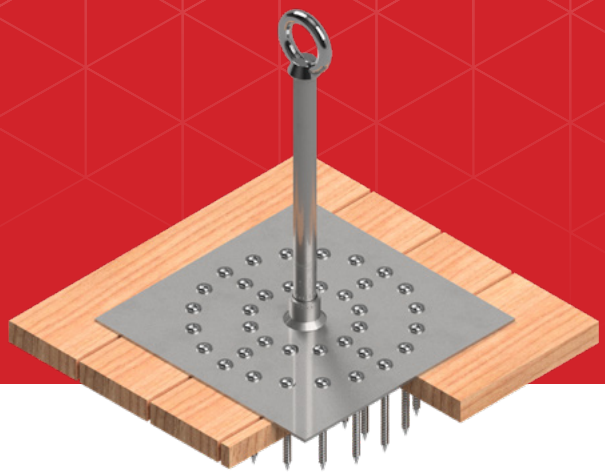

Technical specifications	
Material	Stainless steel (V2A)
Pipe diameter	Ø 20 mm
Base plate	250 x 250 x 5 mm

Installation	
Number of users	max. 3 persons
Wood strength	min. C24
Cross-sectional dimensions of the beam (Width x Height)	min. 60 x 120 mm
OSB board (Width/Thickness)	min. 600 mm / min. 18 mm
Three-layer board (Width/Thickness)	min. 600 mm / min. 18 mm
Multi-layer board (Width/Thickness)	min. 600 mm / min. 18 mm
Distance between two beams	max. 700 mm
Washer-head screws (36 pcs.)	6,0 mm / TX25 A2

Version	Article no.	Height	Roof build-up
Primo 25 HU/30	176300	300 mm	≤ 100 mm
Primo 25 HU/40	176400	400 mm	≤ 200 mm
Primo 25 HU/50	176500	500 mm	≤ 300 mm
Primo 25 HU/60	176600	600 mm	≤ 400 mm
Primo 25 HU/70	176700	700 mm	≤ 500 mm
Primo 25 HU/80	176800	800 mm	100 – 600 mm