
Primo 2 ST

Anchor point for steel beams

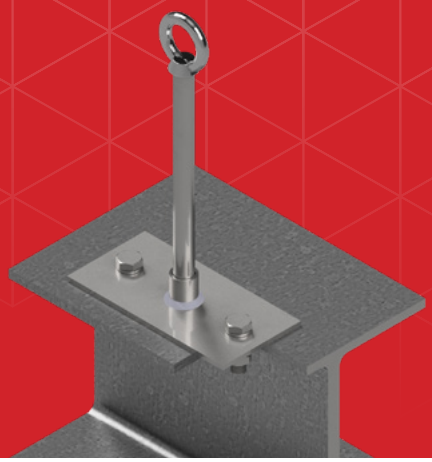

DIN EN 17235 | aBG

Technical specifications	
Material	Stainless steel (V2A)
Pipe diameter	Ø 20 mm
Base plate	100 x 200 x 5 mm

Installation	
Number of users	max. 3 persons
Steel strength	min. S235
Steel thickness	min. 3 mm
Drill hole diameter	Ø 14 mm
Hexagonal screws (2 pcs.)	M12-A2-70
Nuts (2 pcs.)	M16
Washers (4 pcs.)	M16

Version	Article no.	Height	Roof build-up
Primo 2 ST/30	122300	300 mm	≤ 100 mm
Primo 2 ST/40	122400	400 mm	≤ 200 mm
Primo 2 ST/50	122500	500 mm	≤ 300 mm
Primo 2 ST/60	122600	600 mm	≤ 400 mm
Primo 2 ST/70	122700	700 mm	≤ 500 mm
Primo 2 ST/80	122800	800 mm	100 – 600 mm
Primo 2 ST/90	122900	900 mm	200 – 700 mm
Primo 2 ST/100	1229100	1000 mm	300 – 800 mm