
Primo 3 KL

Anchor point for clamping

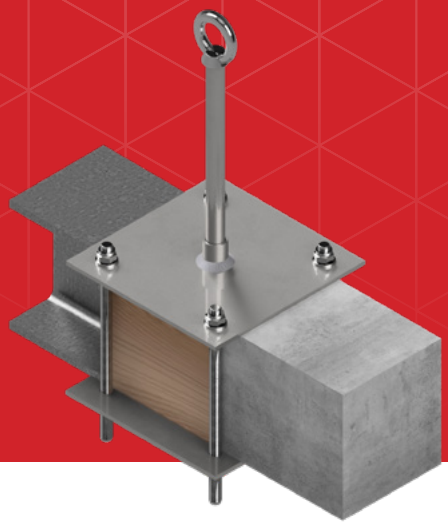

Technical specifications	
Material	Stainless steel (V2A)
Pipe diameter	Ø 20 mm
Base plate	220 x 220 x 5 mm

Installation	
Number of users	max. 3 persons
Substrate	Concrete, steel or wood
Substrate strength	Inspected on-site
Beam width	max. 150 mm
Counter plate	220 x 220 x 5 mm
Anchor rods (4 pcs.)	M12 x 400
Nuts (8 pcs.)	M12
Washers (8 pcs.)	M12

Version	Article no.	Height	Roof build-up
Primo 3 KL/30	239300	300 mm	≤ 100 mm
Primo 3 KL/40	239400	400 mm	≤ 200 mm
Primo 3 KL/50	239500	500 mm	≤ 300 mm
Primo 3 KL/60	239600	600 mm	≤ 400 mm
Primo 3 KL/70	239700	700 mm	≤ 500 mm
Primo 3 KL/80	239800	800 mm	100 – 600 mm
Primo 3 KL/90	239900	900 mm	200 – 700 mm
Primo 3 KL/100	240000	1000 mm	300 - 800 mm