
Primo 3 SP-HO ES

Anchor point for hollow-core prestressed concrete

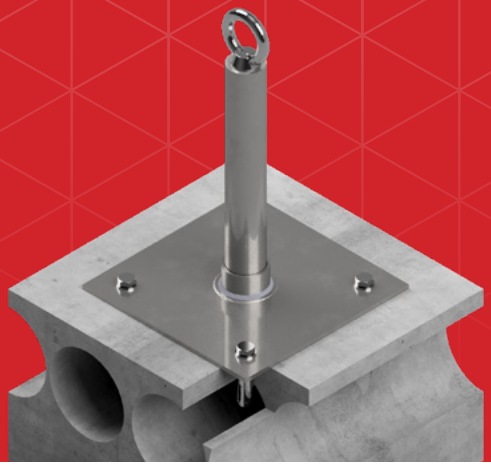

DIN EN 795

Technical specifications	
Material	Stainless steel (V2A)
Pipe diameter	Ø 40 mm
Base plate	220 x 220 x 5 mm

Installation	
Number of users	max. 3 persons
Concrete strength class	min. C45/55
Web thickness	min. 27,5 mm
Edge distance	min. 300 mm
Drill hole diameter	Ø 16 mm
Drill hole depth	min. 65 mm
Hollow-ceiling anchors (4 pcs.)	FHY M10 R

Version	Article no.	Height	Roof build-up
Primo 3 SP-HO ES/30	CH131330	300 mm	≤ 100 mm
Primo 3 SP-HO ES/40	CH131340	400 mm	≤ 200 mm
Primo 3 SP-HO ES/50	CH131350	500 mm	≤ 300 mm
Primo 3 SP-HO ES/60	CH131360	600 mm	≤ 400 mm
Primo 3 SP-HO ES/70	CH131370	700 mm	≤ 500 mm
Primo 3 SP-HO ES/80	CH131380	800 mm	100 – 600 mm
Primo 3 SP-HO ES/90	CH131390	900 mm	200 – 700 mm
Primo 3 SP-HO ES/100	CH1313910	1000 mm	300 - 800 mm