
Primo 47 SP-HU

Anchor point for sandwich panels

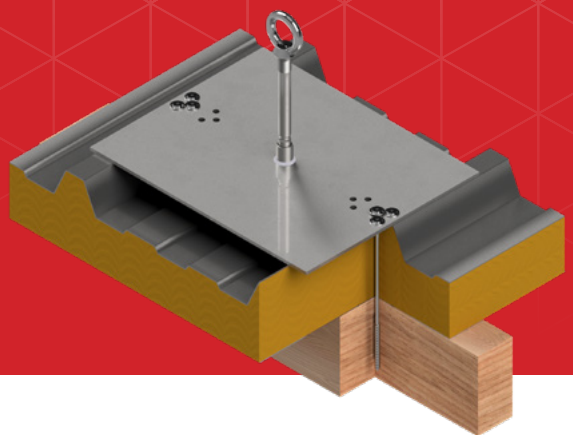


Technical specifications	
Material	Stainless steel (V2A)
Pipe diameter	Ø 20 mm
Base plate	300 x 375 x 5 mm

Installation	
Number of users	max. 3 persons
Total height PU elements	60 – 195 mm
Total height mineral elements	94 – 234 mm
Substructure	Wooden beams
Wood strength	min. C24
Cross-sectional dimensions of the beam (Width x Height)	min. 80 x 140 mm
Washer-head screws (6 pcs.)	8,0 mm / TX40 A2

Version	Article no.	Height	Insulation core thickness
Primo 47 SP-HU/80	H118080	200 mm	25 – 80 mm
Primo 47 SP-HU/120	H118120	200 mm	100 – 120 mm
Primo 47 SP-HU/200	H118200	200 mm	140 – 200 mm

Primo 47 SP-HU

Anchor point for sandwich panels

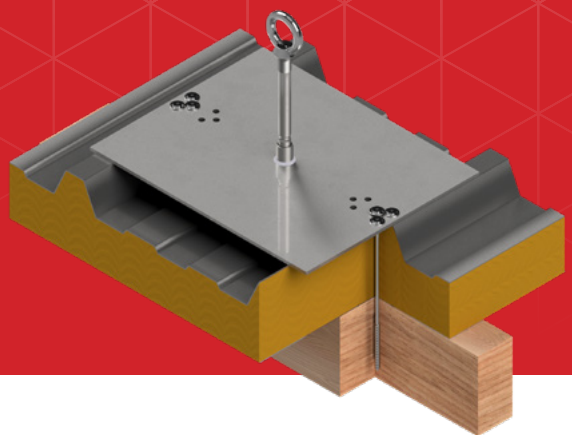

Insulation core thickness	Total thickness	Screw length Wooden beam 80 x 120 mm
25 mm	60 mm	160 mm
40 mm	75 mm	180 mm
60 mm	95 mm	200 mm
80 mm	115 mm	220 mm
100 mm	135 mm	240 mm
120 mm	155 mm	260 mm
140 mm	175 mm	280 mm
150 mm	185 mm	300 mm
160 mm	195 mm	300 mm
175 mm	210 mm	300 mm
200 mm	235 mm	300 mm