
Primo 47 SP-ZP

Anchor point for sandwich panels

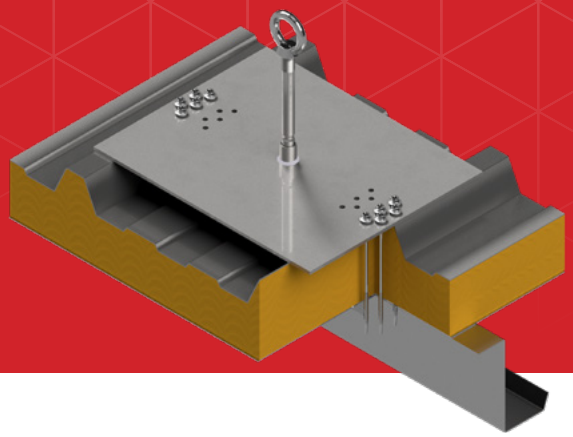


Technical specifications	
Material	Stainless steel (V2A)
Pipe diameter	Ø 20 mm
Base plate	300 x 375 x 5 mm

Installation				
Number of users	max. 4 persons	max. 4 persons	max. 4 persons	max. 4 persons
Total height PU elements	60 – 195 mm	60 – 195 mm	60 – 195 mm	60 – 195 mm
Total height mineral elements	94 – 234 mm	94 – 234 mm	94 – 234 mm	94 – 234 mm
Substructure	Z-purlins	Z-purlins	Hollow profiles	Hollow profiles
Steel strength	min. S235	min. S235	min. S320GD	min. S320GD
Steel thickness	2,5 – 6 mm	2,5 – 12 mm	2 – 6 mm	2 – 12 mm
Steel profile (Width x Height)	min. 60 x 100 mm	min. 60 x 100 mm	min. 60 x 140 mm	min. 60 x 140 mm
Drilling screws (10 pcs.)	JT-D-6H-5,5/6,3	JT-D-12H-5,5/6,3	JT-D-6H-5,5/6,3	JT-D-12H-5,5/6,3

Version	Article no.	Height	Insulation core thickness
Primo 47 SP-ZP/120	ZP118120	200 mm	25 – 120 mm
Primo 47 SP-ZP/200	ZP118200	200 mm	140 – 200 mm

Primo 47 SP-ZP

Anchor point for sandwich panels

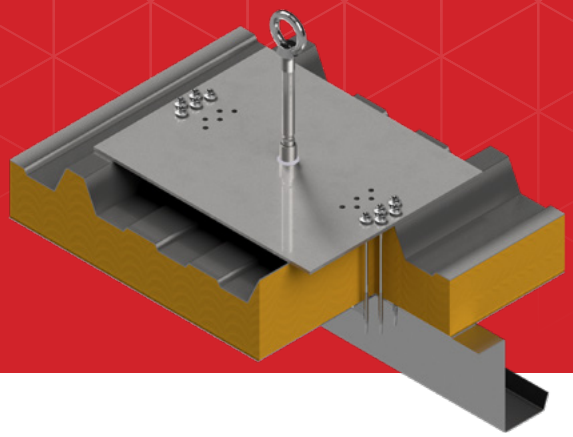

Insulation core thickness	Total thickness	Screw length Steel thickness max. 6 mm	Screw length Steel thickness max. 12 mm
25 mm	60 mm	87 mm	95 mm
40 mm	75 mm	107 mm	115 mm
60 mm	95 mm	127 mm	135 mm
80 mm	115 mm	147 mm	155 mm
100 mm	135 mm	167 mm	175 mm
120 mm	155 mm	197 mm	195 mm
140 mm	175 mm	237 mm	215 mm
150 mm	185 mm	237 mm	245 mm
160 mm	195 mm	237 mm	245 mm
175 mm	210 mm	237 mm	245 mm
200 mm	235 mm	267 mm	275 mm