
Primo 4 TP 2

Anchor point for trapezoidal sheet metal

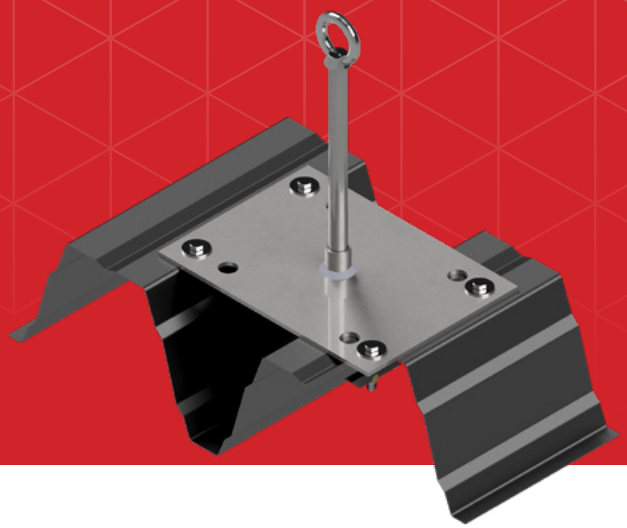

DIN EN 17235 | aBG

Technical specifications	
Material	Stainless steel (V2A)
Pipe diameter	Ø 20 mm
Base plate	214 x 300 x 5 mm

Installation	
Number of users	max. 4 persons
Alignment	Warm roof / Positive position
Rib height	35 – 165 mm
Trapezoidal sheet thickness	min. 0,75 mm
Drill hole diameter	Ø 20 mm
Fasteners (4 pcs.)	Tilting dowels

Version	Article no.	Height	Roof build-up
Primo 4 TP 2/40	182400	400 mm	≤ 200 mm
Primo 4 TP 2/50	182500	500 mm	≤ 300 mm
Primo 4 TP 2/60	182600	600 mm	≤ 400 mm
Primo 4 TP 2/70	182700	700 mm	≤ 500 mm
Primo 4 TP 2/80	182800	800 mm	100 – 600 mm
Primo 4 TP 2/90	182900	900 mm	200 – 700 mm
Primo 4 TP 2/100	1829100	1000 mm	300 – 800 mm