
Primo 4 TP 2 N

Anchor point for trapezoidal sheet metal

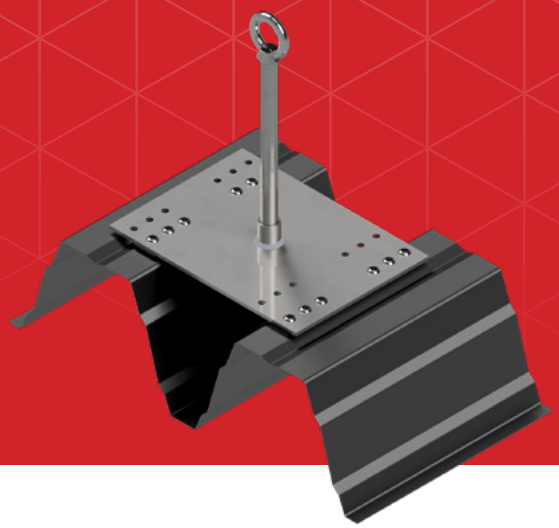

DIN EN 795

Technical specifications	
Material	Stainless steel (V2A)
Pipe diameter	Ø 20 mm
Base plate	214 x 300 x 5 mm

Installation	
Number of users	max. 3 persons
Alignment	Warm roof / Positive position
Bead height	35 – 165 mm
Trapezoidal sheet thickness	min. 0,75 mm
Drill hole diameter	Ø 7,8 mm
Fasteners (12 pcs.)	Special rivets

Version	Article no.	Height	Roof build-up
Primo 4 TP 2 N/40	N182400	400 mm	≤ 200 mm
Primo 4 TP 2 N/50	N182500	500 mm	≤ 300 mm
Primo 4 TP 2 N/60	N182600	600 mm	≤ 400 mm
Primo 4 TP 2 N/70	N182700	700 mm	≤ 500 mm
Primo 4 TP 2 N/80	N182800	800 mm	100 – 600 mm