
Primo 4 TP 2 NL

Anchor point for trapezoidal sheet metal

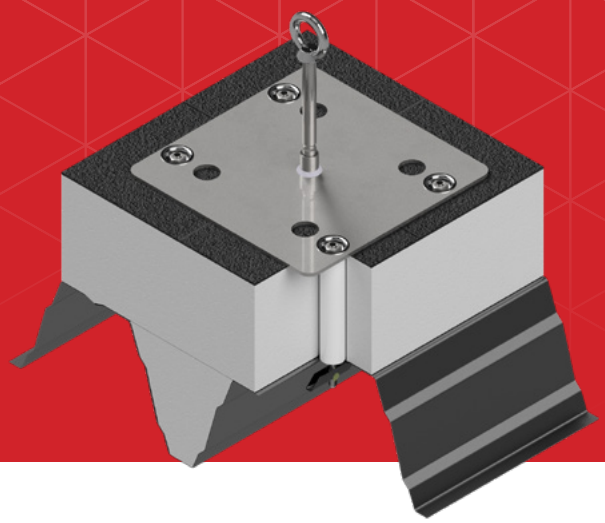

DIN EN 795

Technical specifications	
Material	Stainless steel (V2A)
Pipe diameter	Ø 20 mm
Base plate	300 x 300 x 5 mm

Installation	
Number of users	max. 2 persons
Alignment	Warm roof / Positive position
Rib height	35 – 165 mm
Trapezoidal sheet thickness	min. 0,75 mm
Edge distance to edge of the insulation	min. 1000 mm
Drill hole diameter in the insulation	Ø 30 mm
Drill hole diameter	Ø 20 mm
Fasteners (4 pcs.)	Tilting dowels
Installation	On top of the insulation (without opening the roof membrane)

Version	Article no.	Height
Primo 4 TP NL	NL182300	220 mm