
Primo 4 TP 3 ES

Anchor point for trapezoidal sheet metal

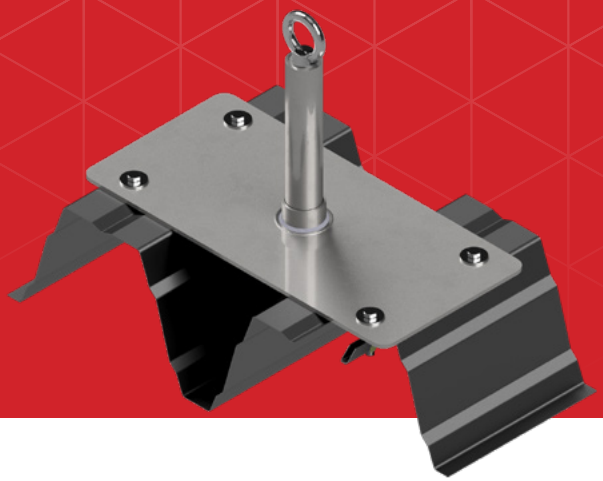

DIN EN 795

Technical specifications	
Material	Stainless steel (V2A)
Pipe diameter	Ø 40 mm
Base plate	214 x 450 x 5 mm

Installation	
Number of users	max. 3 persons
Alignment	Warm roof / Positive position
Trapeze profiles	200/375 – 200/420
Trapezoidal sheet thickness	min. 0,75 mm
Drill hole diameter	Ø 20 mm
Fasteners (4 pcs.)	Tilting dowels

Version	Article no.	Height	Roof build-up
Primo 4 TP 3/30	CH162400	300 mm	≤ 100 mm
Primo 4 TP 3/40	CH162401	400 mm	≤ 200 mm
Primo 4 TP 3/50	CH162402	500 mm	≤ 300 mm
Primo 4 TP 3/60	CH162403	600 mm	≤ 400 mm
Primo 4 TP 3/70	CH162404	700 mm	≤ 500 mm
Primo 4 TP 3/80	CH162405	800 mm	100 – 600 mm