
Primo 60 SP-HO

Rope access system for hollow-core prestressed concrete

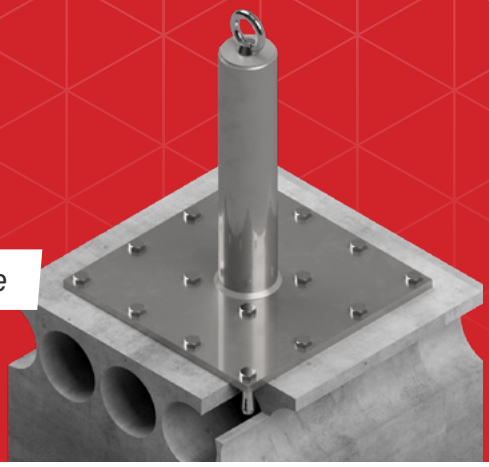

aBG

Technical specifications	
Material	Stainless steel (V2A)
Pipe diameter	refer to the static calculation
Base plate	refer to the static calculation

Installation	
Number of users	max. 3 persons
Rope access system	max. 1 person
Concrete strength class	min. C45/55
Web thickness	min. 40 mm
Edge distance	min. 100 mm
Drill hole diameter	Ø 16 mm
Drill hole depth	min. 65 mm
Hollow-ceiling anchors (16 or 24 pcs.)	FHY M10 R

Version	Article no.	Height
Primo 60 SP-HO/20	6014200	200 mm
Primo 60 SP-HO/30	6014300	300 mm
Primo 60 SP-HO/40	6014400	400 mm
Primo 60 SP-HO/50	6014500	500 mm
Primo 60 SP-HO/60	6014600	600 mm
Primo 60 SP-HO/70	6014700	700 mm
Primo 60 SP-HO/80	6014800	800 mm