
Primo 7 HS

Anchor point for framework boards

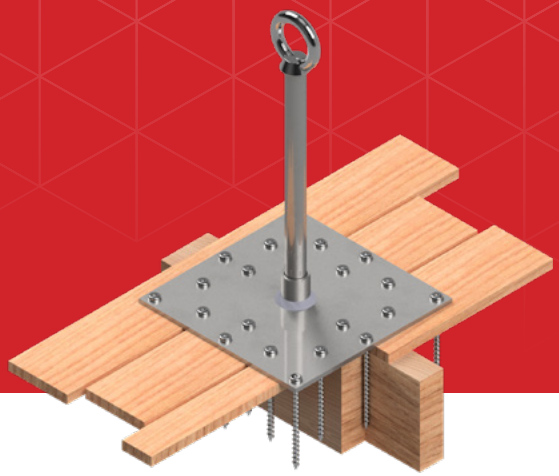

Technical specifications	
Material	Stainless steel (V2A)
Pipe diameter	Ø 20 mm
Base plate	200 x 200 x 5 mm

Installation	
Number of users	max. 2 persons
Wood strength	min. C24
Cross-sectional dimensions of the beam (Width x Height)	min. 60 x 100 mm
Framework board (Width/Thickness)	100 – 300 mm / min. 24 mm
Distance between two beams	min. 930 mm
Edge distance to the end of the beam	min. 500 mm
Round-head wood screws (20 pcs.)	6,0 mm / TX25 A2

Version	Article no.	Height	Roof build-up
Primo 7 HS/30	171300	300 mm	≤ 100 mm
Primo 7 HS/40	171400	400 mm	≤ 200 mm
Primo 7 HS/50	171500	500 mm	≤ 300 mm
Primo 7 HS/60	171600	600 mm	≤ 400 mm
Primo 7 HS/70	171700	700 mm	≤ 500 mm
Primo 7 HS/80	171800	800 mm	100 – 600 mm
Primo 7 HS/90	171900	900 mm	200 – 700 mm
Primo 7 HS/100	1719100	1000 mm	300 - 800 mm